


8.4" LED Specifications



Key Features

- Sunlight Readable
- LED Backlight
- High Shock & Vibration Resistance
- Low Power Consumption
- Wide Temp. Range (-20 C~60 C)
- High Uniformity (90%)
- Low EMI Noise
- Wide Dimming
- Multiple Mounting Choices
- Life Expectancy (70,000hrs)

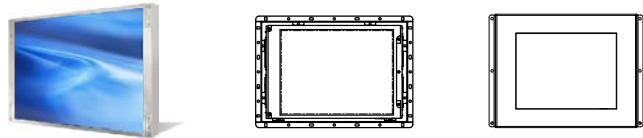

DLF/DLH/SLO/SLD0835

Model No.	DLF0835	DLH0835	SLO0835	SLD0835
LCD Display	8.4" LED Backlight			
Display Area	170.4x127.8 mm			
Brightness	1000 cd/m ²			
Resolution	800 x600 (SVGA)			
Contrast Ratio	600 : 1			
Pixel Pitch (mm)	0.213(H) x 0.213(V)			
Viewing Angle	+60 ~-60 (H), +65 ~-55 (V)			
Display Color	16M			
Response Time	30ms			
Sync	LVDS			
Power Consumption	7W	12W	12W	12W
LED Driving Board	LI D08A02			
Control Board (Optional)		AD5621GA AD5621GD AD5766GDVA	AD5621GA AD5621GD AD5766GDVA	AD5621GA AD5621GD AD5766GDVA
F / R Control Button		5 Key	4 Key	
OSD Menu		Brightness, Contrast, H/V Position, Color, Phase, Clock....		
Dimensions (WxHxD)mm	199.5x149.5x11.6	199.5x149.5x11.6	241x171x43.7	241x171x44.7
Weight	380g	480g	1.4kg	1.7kg
Optional	AOT	Touch	Waterproof	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA
AD5621GA	VGA+Audio
AD5621GD	VGA+DVI
AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
F / R Control Button	5 Key / 4 Key (Optional)
5 Key	Power Switch, Menu, Select (+,-), Auto
4 Key	Power Switch, Menu, Select (+,-)



Product Inquiries to:
 Flat Panel Display Solutions LLC.
 info@FPDSolutions.com
 skype: sunlight.fpd
 Phone: 503-992-1242

Premium Optical Lamination of Clear and Matte Anti-Reflection Film.
 Optical Bonding AR and AG Glass, Touch Panels, Optical Filters and Shields
 US Value Add, Warranty, and Support
 Polarizer and Backlight Repair
 Display Optimization and Contract Assembly
 Consulting and Design Guidance

Your Industrial Solutions Partner!