

LED B/L Specifications



Durapixel™

Key Features

- Sunlight Readable
- LED Backlight
- -20°C~60°C Wide Temp.
- Low Power Consumption
- High Shock & Vibration Resistance
- 90% High Uniformity
- Low EMI Noise
- Wide Dimming
- Multiple Mounting Choices
- 70000hrs Life Expectancy



DLF/DLH1055 (CMO G104X1L01)



Product Support by:
Flat Panel Display Solutions LLC.
info@FPDSolutions.com
skype: sunlight.fpd
Phone: 503-992-1242

Premium Optical Lamination of Clear and
Anti-Reflection Film
Optical Bonding AR and AG Glass, Touch
Panels, Optical Filters and Shields
US Value Add, Warranty, and Support
Processor and Backlight Repair
Display Optimization and Contract
Assembly
Consulting and Design Guidance

Model No.	DLF1055	DLH1055
LCD Display	10.4" LED Backlight LCD	10.4" LED Backlight LCD
Display Area	210.4 x 157.8mm	210.4 x 157.8mm
Brightness	800 cd/m ² (Max.1000 cd/m ²)	800 cd/m ² (Max.1000 cd/m ²)
Resolution	1024 x 768 (XGA)	1024 x 768 (XGA)
Contrast Ratio	1200 : 1	1200 : 1
Pixel Pitch (mm)	0.0685(H) x 0.2055(V)	0.0685(H) x 0.2055(V)
Viewing Angle	150°(H), 150°(V)	150°(H), 150°(V)
Display Colors	16.2M colors	16.2M colors
Response Time	40ms (Typical)	40ms (Typical)
Sync	LVDS x 1 Channel	LVDS x 1 Channel
Power Consumption	16.2W	21.2W
LED Driving Board	LI D12A	LI D12A
Control Board (Optional)		AD5621GA (Standard)
F / R Control Button		Power Switch, Menu, Select (+,-), Auto
OSD Menu		Brightness, Contrast, H/V Position, Color, Phase, Clock....
Dimensions (WxHxD)	238.1x173x13mm	238.1x173x13mm
Weight	650g	710g
Optional	<input checked="" type="checkbox"/> AOT <input checked="" type="checkbox"/> Touch Screen	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA/AD1501GDV
<input checked="" type="checkbox"/> AD5621GA	VGA+Audio
<input checked="" type="checkbox"/> AD5621GD	VGA+DVI
<input checked="" type="checkbox"/> AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
F / R Control Button	5 Key / 4 Key (Optional)
<input checked="" type="checkbox"/> 5 Key	Power Switch, Menu, Select (+,-), Auto
<input checked="" type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-)

DLF= Panel+Driving Board

DLH= Panel+Driving Board+Control Board




LED B/L Specifications



Durapixel™



Outline Dimensions
unit:mm

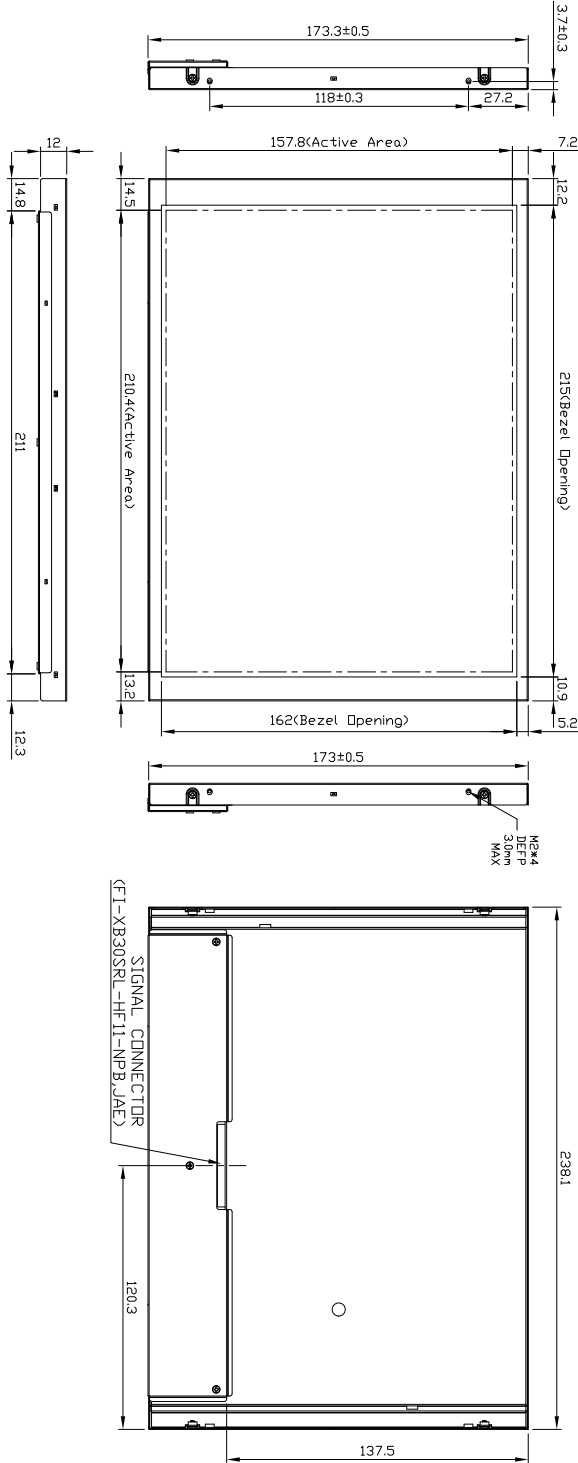

Product Inquiries to:
Flat Panel Display Solutions LLC.
info@FPDSolutions.com
skype: sunlight.fpd
Phone: 503-992-1242



Premium Optical Lamination of Clear and Matte Anti-Reflection Film
Optical Bonding AR and AG Glass, Touch Panels, Optical Filters and Shields
US Value Add, Warranty, and Support
Polarizer and Backlight Repair
Display Optimization and Contract Assembly
Consulting and Design Guidance

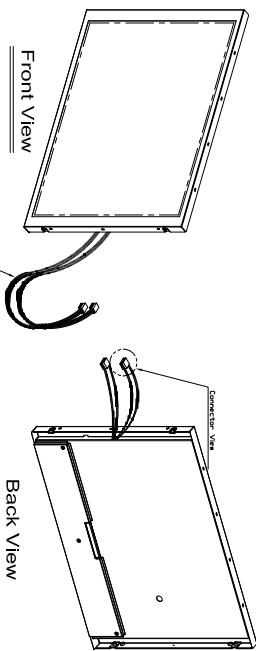

- Note :
- 1.Outline Tolerance : 0.5mm
 - 2.LED Connector : HD2505-02
 - 3.LED Cable : L=100±10mm

Enrich your visual world....