


10.4" LED Specifications



Key Features

- Sunlight Readable
- LED Backlight
- High Shock & Vibration Resistance
- Low Power Consumption
- Wide Temp. Range (-20 C~60 C)
- High Uniformity (90%)
- Low EMI Noise
- Wide Dimming
- Multiple Mounting Choices
- Life Expectancy (70,000hrs)

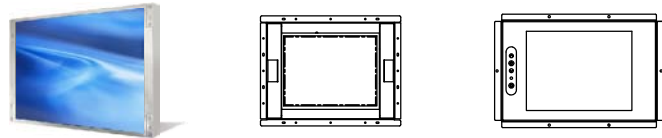

DLF/DLH/SLO/SLD1065

Model No.	DLF1063 / 65	DLH1063 / 65	SLO1063 / 65	SLD1063 / 65
LCD Display	10.4" LED Backlight LCD			
Display Area	210.4 x 157.8mm			
Brightness	560 cd/m ² /1000 cd/m ²			
Resolution	1024 x 768(XGA)			
Contrast Ratio	500 : 1			
Pixel Pitch (mm)	0.0685(H) x 0.0685(V)			
Viewing Angle	150 (H), 150 (V)			
Display Color	16.2M			
Response Time	40ms (Typical)			
Sync	LVDS			
Power Consumption	3.5W / 8.6W	8.5W / 13.6W	8.5W / 13.6W	8.5W / 13.6W
LED Driving Board	LI D10A			
Control Board (Optional)		AD5621GA AD5621GD AD5766GDVA	AD5621GA AD5621GD AD5766GDVA	AD5621GA AD5621GD AD5766GDVA
F / R Control Button		5 Key	4 Key	
OSD Menu		Brightness, Contrast, H/V Position, Color, Phase, Clock....		
Dimensions (WxHxD)mm	238.6x173.2x6	238.6x173.2x6	324x254x50	340x228x54.2
Weight	690g	790g	2.2kg	2.72kg
Optional	AOT	Touch	Waterproof	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA
AD5621GA	VGA+Audio
AD5621GD	VGA+DVI
AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
F / R Control Button	5 Key / 4 Key (Optional)
5 Key	Power Switch, Menu, Select (+,-), Auto
4 Key	Power Switch, Menu, Select (+,-)



Product Inquiries to:
Flat Panel Display Solutions LLC.
info@FPDSolutions.com
skype: sunlight.fpd
Phone: 503-992-1242

Premium Optical Lamination of Clear and Matte Anti-Reflection Film
Optical Bonding AR and AG Glass, Touch Panels, Optical Filters and Shields
US Value Add, Warranty, and Support
Polarizer and Backlight Repair
Display Optimization and Contract Assembly
Consulting and Design Guidance

Your Industrial Solutions Partner!