

# LED B/L Specifications



Durapixel™

## Key Features

- Sunlight Readable
- LED Backlight
- -20°C~60°C Wide Temp.
- Low Power Consumption
- High Shock & Vibration Resistance
- 90% High Uniformity
- Low EMI Noise
- Wide Dimming
- Multiple Mounting Choices
- 70000hrs Life Expectancy



## DLF/DLH1555 (CMO G150X1-L02)

Model No.	DLF1555	DLH1555
LCD Display	15" LED Backlight LCD	15" LED Backlight LCD
Display Area	304.128 x 228.096mm	304.128 x 228.096mm
Brightness	1000 cd/m <sup>2</sup>	1000 cd/m <sup>2</sup>
Resolution	1024 x 768 (XGA)	1024 x 768 (XGA)
Contrast Ratio	700 : 1	700 : 1
Pixel Pitch (mm)	0.297(H) x 0.297(V)	0.297(H) x 0.297(V)
Viewing Angle	160°(H), 160°(V)	160°(H), 160°(V)
Display Colors	16,194,277 colors	16,194,277 colors
Response Time	25ms (Typical)	25ms (Typical)
Sync	LVDS x 1 Channel	LVDS x 1 Channel
Power Consumption	15W	20W
LED Driving Board	LI D15A02	LI D15A02
Control Board (Optional)		AD5621GA (Standard)
F / R Control Button		Power Switch, Menu, Select (+,-), Auto
OSD Menu		Brightness, Contrast, H/V Position, Color, Phase, Clock....
Dimensions (WxHxD)	326.5x253.5x14.5mm	326.5x253.5x14.5mm
Weight	1500g	1560g
Optional	<input checked="" type="checkbox"/> AOT <input checked="" type="checkbox"/> Touch Screen	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

<b>Control Board (Optional)</b>	AD5621GA/AD5621GD/AD5766GDVA/AD1501GDV
<input checked="" type="checkbox"/> AD5621GA	VGA+Audio
<input checked="" type="checkbox"/> AD5621GD	VGA+DVI
<input checked="" type="checkbox"/> AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
<input checked="" type="checkbox"/> AD1501GDV	VGA+DVI+S-Video
<b>F / R Control Button</b>	5 Key / 4 Key (Optional)
<input checked="" type="checkbox"/> 5 Key	Power Switch, Menu, Select (+,-), Auto
<input checked="" type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-)

DLF= Panel+Driving Board

DLH= Panel+Driving Board+Control Board



Product Features:  
 Flat Panel Display Solutions LLC.  
 info@FPDSolutions.com  
 skype: sunlight.fpd  
 Phone: 503-992-1242



Premium Optical Lamination of Clear and Matte Anti-Reflection Film  
 Optical Bonding AR and AG Glass, Touch Panels, Optical Filters and Shields  
 US Value Add, Warranty, and Support  
 Polarizer and Backlight Repair  
 Display Optimization and Contract Assembly  
 Consulting and Design Guidance




# LED B/L Specifications



Durapixel™

Outline Dimensions  
unit:mm

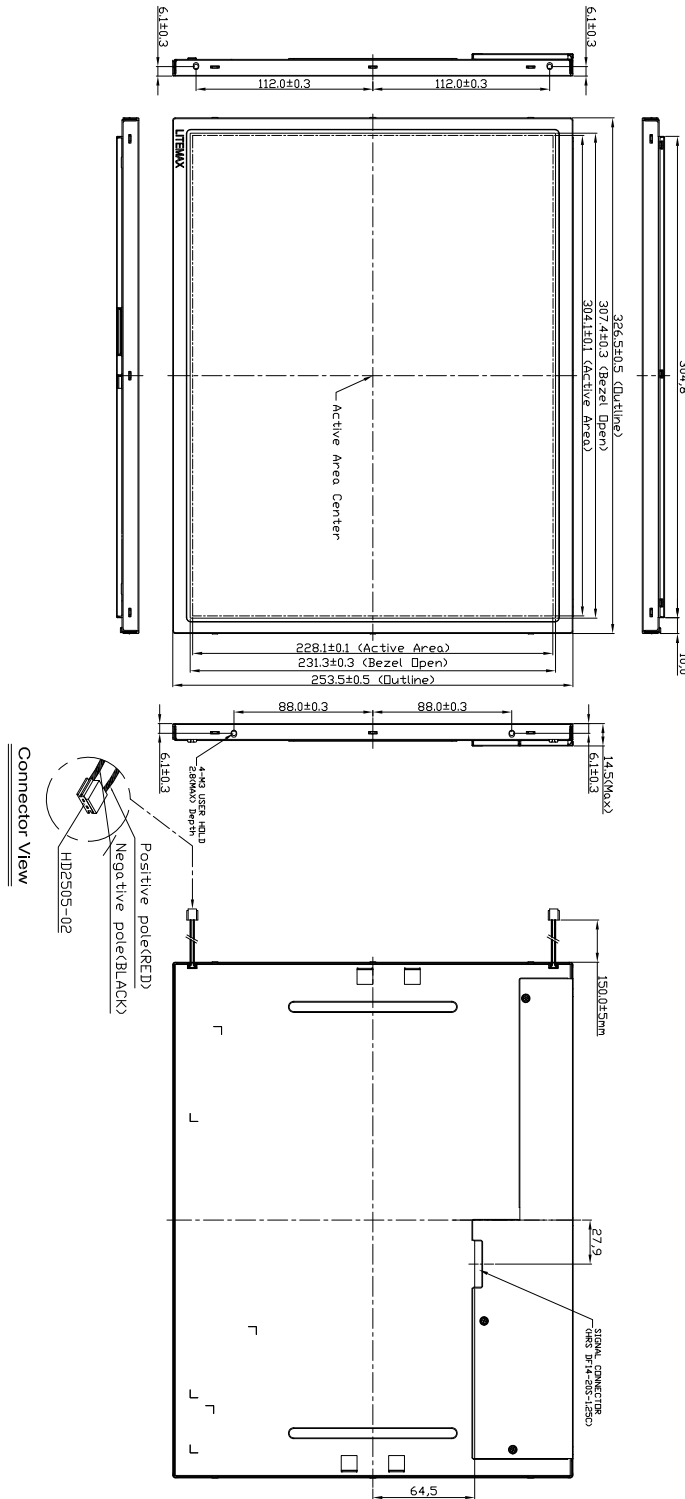

Product Inquiries to:  
Flat Panel Display Solutions LLC.  
info@FPDSolutions.com  
skype: sunlight.fpd  
Phone: 503-992-1242

Premium Optical Lamination of Clear and Matte Anti-Reflection Film  
Optical Bonding AR and AG Glass, Touch Panels, Optical Filters and Shields  
US Value Add, Warranty, and Support  
Polarizer and Backlight Repair  
Display Optimization and Contract Assembly  
Consulting and Design Guidance



- Note :
- 1.Outline Tolerance : 0.5mm
  - 2.LED Connector : HD2505-02
  - 3.LED Cable : U13239 AWG22 L=150±5mm

Enrich your visual world....